

PCT/JP2005/001988 03.2.2005



INVESTOR IN PEOPLE

11/597647


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

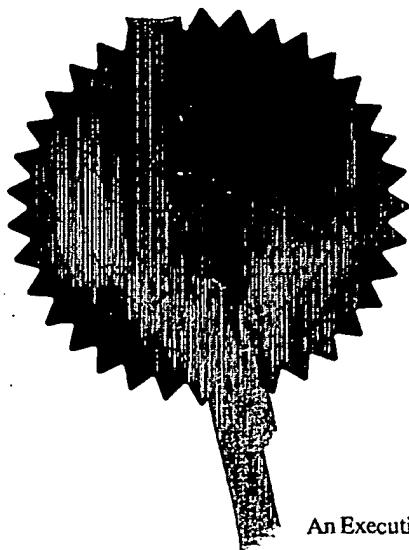

Signed

*P. Lohoney*

Dated 4 January 2005


**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Patents Act 1977  
(Rule 16)

05FEB04 E870848-2 000335  
P01/7700 0.00-0402498.0 ACCOUNT CHA

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

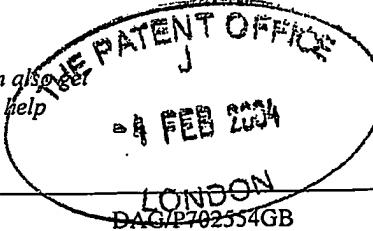

The Patent Office

Cardiff Road  
Newport  
Gwent NP10 8QQ

1.	Your reference		
2.	Patent application number (The Patent Office will fill in this part)	0402498.0	- 4 FEB 2004
3.	Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )	NEC Technologies (UK) Ltd Level 3 Imperium, Imperial Way Reading, Berkshire, RG2 0TD	
	Patents ADP number ( <i>if you know it</i> )		
	If the applicant is a corporate body, give the country/state of its incorporation	UNITED KINGDOM      7012313002 A/L 05.03.04	
4.	Title of the invention	System and Method for Network Handover	
5.	Name of your agent ( <i>if you have one</i> )	W.P. THOMPSON & CO.	
	"Address for service" in the United Kingdom to which all correspondence should be sent ( <i>including the postcode</i> )	55 Drury Lane London WC2B 5SQ	
	Patents ADP number ( <i>if you know it</i> )	158007 ✓	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and ( <i>if you know it</i> ) the or each application number	Country	Priority application number ( <i>if you know it</i> )      Date of filing ( <i>Day/month/year</i> )
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing ( <i>Day/month/year</i> )
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? ( <i>Answer 'yes' if:</i> a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES	


9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 9

Claims(s) 4

Abstract 1

Drawing(s) 3 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 1

Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application

Signature  Date February 4, 2004

W.P. THOMPSON & CO.

12. Name and daytime telephone number of person to contact in the United Kingdom David Alan Gill  
020 7240 2220

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' *Patents Form 7/77* will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

System and Method for Network Handover

The present invention relates to a system and method for network handover to be adopted, in particular, in relation to a mobile radio communications device required to handover from the first radio access technology to a second radio access technology.

In order to realise the full advantages available with multimode radio communication devices, such as multimode cellular telephones, it is recognised that such devices may be requested to change from operation with the radio access technology of one network, to operation with a different radio access technology of a second network. For example, with the increasing availability and use of third generation networks, it is likely that such networks will be overlaid with earlier second-generation networks. Users of such networks will be divided between both depending on, in particular, user priority, the service requested, the coverage and other operator strategies so as to effectively manage network resources.

During a call, a user's terminal may therefore be requested to hand over from, for example, a Universal Mobile Telephone Services (UMTS) network cell to a Global Systems for Mobile communications (GSM) network cell. In order to limit the impact on the terminal and that might be discernable to the user of that terminal, any such handover should happen as quickly and smoothly as possible and with minimum interruption to the call currently in place. A variety of data is required in order to achieve handover with minimum disruption and one particularly important piece of information required concerning the cell to which the terminal is to be handed over to comprises the timing advance information.

Such information is required so that appropriate synchronisation to the new cell can be achieved so that the communication signal sent to that cell

can be sent at an appropriate time so as to reach the target Basestation System (BSS) at the appropriate time slot.

As currently known, if, for example, the terminal has measured the  
5 observed time difference to the GSM cell while operating on the UMTS cell,  
and the network has also signalled the real time difference between for  
example a Node B and the BSS to the terminal, the terminal can then calculate  
the new timing advance value. However, if such arrangement does not prove  
possible, the BSS then has to calculate the time and advance value by  
10 requesting the terminal to transmit access bursts.

Such arrangements are however disadvantageously limited due to the  
additional signalling created and the delays in handover that can arise.

15 The present invention seeks to provide for a network handover system  
and method having advantages over known such methods and systems.

According to one aspect of the present invention, there is provided a  
method of handover from a first radio access technology to a second radio  
20 access technology for a mobile radio communications device within a mobile  
radio communications network, and including determining a timing advance  
value associated with the second radio access technology, the method  
employing positional data of the device within the network for determining the  
said timing advance value.

25 Through the use of the positional data, which can be obtained in  
accordance with any appropriate position measuring arrangement, such as  
GPS-based or otherwise, the timing advance value can be calculated without  
requirement for the excess signalling that arises at the time of handover in  
30 accordance with known arrangements. A far faster process than is currently  
available can therefore be provided.

The advantageous shorter interruptions that arise due to the faster handover and reduction in signalling advantageously leads to improved resource utilisation and a reduction in the perceived inconvenience and interruption for the user.

5

The present invention can advantageously make the timing advance information available within the handover command which assists in overcoming the need for access burst transmissions and subsequent signalling of the timing advance information.

10

Preferably, the location of the BSS associated with the second radio access technology is also determined and employed in calculating the timing advance value.

15

Advantageously, the aforementioned positional data is determined prior to generation of the handover command.

The timing advance value is advantageously determined within the network and transmitted to the terminal as required.

20

In particular, the Serving Radio Network Controller (SRNC) is arranged to receive the positional information which is then advantageously passed via the Core Network (CN) to the BSS. The timing advance value can advantageously be signalled to the device within the handover command.

25

Of course, as an alternative, the timing advance can be calculated within the device.

According to another aspect of the present invention, there is provided  
30 a mobile communications system arranged for operation with a first radio access technology and a second radio access technology and including means for initiating the handover of a mobile radio communications device

from the first radio access technology to the second radio access technology, wherein the means for initiating the handover including means for determining a timing advance value associated with the second radio access technology and wherein such means is arranged to employ positional data of the terminal  
5 within the network for determining the said timing advance value.

The system can be arranged to operate in accordance with the advantageous further features as discussed above.

10 The invention is described further hereinafter, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a diagrammatic representation of a currently specified handover procedure from a UMTS to the GSM cell;

15

Fig. 2 is a representation of the handover procedure according to an embodiment of the present invention;

20

Fig. 3 is a schematic flow diagram illustrating an embodiment of the present invention; and

Fig. 4 is block-timing diagram illustrating advantages arising in accordance with the present invention.

25

As will therefore be appreciated, the present concept provides for the advantageous use of positional information of the terminal so as to provide timing advance information to the terminal in a manner which leads to a faster handover procedure exhibiting a reduced signalling overhead.

30

In order to illustrate the present invention further, there now follows a discussion of the currently known handover procedure from a UMTS cell to a

GSM cell and as specified in the current 3<sup>rd</sup> Generation Partnership Project (3GPP).

5        Upon the SRNC deciding that handover from the UMTS cell to a GSM cell is required, it sends a RELOCATION REQUIRED message to the CN which serves to initiate the procedure for handover to the GSM cell. During the handover process, the link to the Universal Mobile Telephone Services Terrestrial Radio Access Network (UTRAN) is dropped and a new link is set-up to the BSS associated with the GSM cell.

10

      A HANDOVER FROM UTRAN command is then sent to the terminal and includes information such as the frequency, channel description, transmit power level and timeslot etc that assists the terminal in setting up the new link to the BSS associated with the GSM cell. It should be noted that a  
15    HANDOVER ACCESS message can be optionally requested by the network. The aforementioned arrangement allows the BSS to calculate the timing advance value which can then be signalled by the BSS to the terminal as part of the PHYSICAL INFORMATION message.

20        As will be appreciated, the timing advance value is a key physical layer parameter which enables the terminal to commence its normal burst transmission at the appropriate time so as to reach the BSS associated with the GSM cell within the specified timeslot.

25        The known specification also suggests that the timing advance value can be calculated by the terminal itself if it can be arranged to measure the observed time difference to the GSM cell while connected to the UMTS cell and if the network has signalled the real time difference between the Node B and the BSS.

30

      If the terminal is not able to measure the aforesaid observed time difference, or the network is not in a position to signal the real time difference



between the Node B and the BSS, then the timing advance cannot be calculated at the terminal but rather has to be signalled to the terminal by the network as discussed above.

5           With the arrangement discussed above, the handover access burst allows the network to estimate the timing advance and deliver an appropriate value for the timing advance to the terminal. It should be noted that the access burst may have to be transmitted several times before the network returns the timing advance information.

10

However, in accordance with the present invention, it is identified that, if the network can estimate the timing advance prior to the handover command, then the additional signalling mentioned above, and the associated delay, can advantageously be avoided.

15

According to the present invention, it is proposed that the network employ determination of the terminal position so as to derive the timing advance value.

20

The use of positional data is considered advantageous since the typical positioning accuracy required for location services with mobile terminals effectively operates within sub-100m accuracy. This level of accuracy exceeds the required timing advance accuracy. On this basis, no additional powerful processing is required to calculate the timing advance from the position estimation since an appropriate level of accuracy is already inherent in the data provided.

25

As a further advantage, within UMTS there is an optional provision to support position reporting by the terminal. Also, in view of commercial  
30 considerations relating to the provision of location based value-added services and regulatory requirements for emergency services, the ability for location determination and position reporting is increasingly available and can readily

be supported by a dual-mode terminal. The present invention can therefore readily be incorporated to currently available systems.

Thus, there is little, if any, overhead in requiring the network to obtain  
5 terminal position data, or to request such data prior to handover. Knowledge  
of the terminal position and the location of the Node B, and the new BSS  
associated with the radio access technology to which the terminal is to hand  
over is then advantageously employed to calculate the timing advance value  
which can itself then be signalled to the terminal as part of the HANDOVER  
10 FROM UTRAN command.

An example of an appropriate procedure embodying the present  
invention is illustrated by way of Fig. 2 and which relates to a handover from  
UTRAN to GSM by means of positional information.

15

As will be appreciated from Fig. 2, the SRNC obtains the position  
information prior to requesting handover to the GSM cell. This information is  
then passed via the CN to the new BSS and this new BSS is then arranged to  
signal the timing advance value to the terminal via the HANDOVER FROM  
20 UTRAN command.

The information flow between the various entities discussed above is  
illustrated further with reference to Fig. 3.

25 The system illustrated in Fig. 3 comprises a dual mode terminal 10,  
Node B 12 associated with a radio network controller 14 and a representation  
of the core network 16.

Also illustrated are a basestation controller 18 and base transceiver 20  
30 forming, in combination, the new basestation system.

The procedure commences at the terminal 10 with the delivery, by way of arrows 22, 24 and 26 of positional information relating to the terminal 10, Node B 12 and radio network controller 14 respectively, to the core network 16.

5

On the basis of this positional information, the timing advance signal is calculated at the core network 16 and then returned by way of arrows 28 to the terminal 10 by way of the radio network controller 14 and Node B 12.

10 The receipt of the handover command signal, including the timing advance value, at the terminal 10 allows for the generation of a signal 30 from the terminal 10 confirming that the handover is complete and also within the appropriate timeslot to the new basestation system associated with the GSM network.

15

Turning now to Fig. 4, there is provided an illustrated although not to scale, of the potential timesavings achievable in accordance with the present invention.

20 The upper half of the diagram illustrates the handover procedure from UMTS to GSM in accordance with current standard procedure and which illustrates UMTS control signalling 32, and GSM control signalling 34, as required so as to complete the handover procedure and commence transmission of the GSM traffic 36.

25

By comparison, the lower part of the diagram illustrates the handover from UMTS to GSM in accordance with an embodiment of the present invention and which illustrates how the completed handover and transmission of GSM traffic 38 can be achieved without requiring the same level of GSM  
30 control signalling as arising in the prior-art.

As will be appreciated, the present invention exhibits a variety of advantages. In particular, through use of the invention, the use of multiple excess bursts, and the physical information message, can be avoided so as to lead to an advantageous reduction in the signal required for handover.

5

The faster handover from UTRAN to GSM can therefore be achieved so as to lead to less inconvenience and potential disruption for the user.

Current 3GPP specifications provide for the capability to support the present invention without significant changes in view of the implementation of position determination inherent in such specification.

Further, the invention advantageously employs information that is currently available within the network so as to provide the information required by the terminal to achieve the accurate and speedy handover.

15

Also, relatively simple processing can be employed to process the position information in order to provide the timing advance early to the terminal.

20

As noted previously, the invention can also be readily arranged so that the timing advance is calculated within the handset, rather than within the network and with appropriate employment of a Radio Resource LCS Protocol (RRLP) signalling information.

25

30

Claims

1. A method of handover from a first radio access technology to a second radio access technology for a mobile radio communications device within a mobile radio communications network, and including determining a timing advance value associated with the second radio access technology, the method employing positional data of the device within the network for determining the said timing advance value.
2. A method as claimed in Claim 1, wherein the timing advance value is also determined on the basis of the location of the basestation system associated with the second radio access technology.
3. A method as claimed in Claim 1 or 2, wherein the positional data of the device is determined prior to handover.
4. A method as claimed in Claim 1, 2 or 3, wherein the timing advance value is determined within the network.
5. A method as claimed in Claim 4, wherein the positional data is provided within a serving radio network controller of the network.
6. A method as claimed in Claim 5, wherein the positional data is delivered by way of a core network arrangement to the basestation system.

7. A method as claimed in Claim 5 or 6, wherein the timing advance value is signalled to the device from the basestation system.
- 5 8. A method as claimed in Claim 7, wherein the timing advance value is included within the handover command as received by the device.
- 10 9. A method as claimed in any one or more of Claims 1 to 3, wherein the timing advance value is determined within the device.
- 15 10. A mobile communications system arranged for operation with a first radio access technology and a second radio access technology and including means for initiating the handover of a mobile radio communications device from the first radio access technology to the second radio access technology, wherein the means for initiating the handover including means for determining a timing advance value associated with the second radio access technology and wherein such means is arranged to employ positional data of the device within the network for determining the said timing advance value.
- 20
- 25 11. A system as claimed in Claim 10, and arranged such that the timing advance value is also determined on the basis of the location of the basestation system associated with the second radio access technology.
- 30 12. A system as claimed in Claim 10 or 11, and arranged such that the positional data of the device is determined prior to handover.

13. A system as claimed in Claim 10, 11 or 12, and arranged such that the timing advance value is determined within the network.
- 5
14. A system as claimed in Claim 13, and arranged such that the positional data is provided within a serving radio network controller.
- 10
15. A system as claimed in Claim 14, and arranged such that the positional data is delivered by way of a core network arrangement to the basestation system.
- 15
16. A system as claimed in Claim 13 or 14, and arranged for signalling the timing advance value to the device from the basestation system.
- 20
17. A system as claimed in Claim 16, wherein the timing advance value is included within the handover command as received by the device.
- 25
18. A system as claimed in any one or more of Claim 10 to 12, and arranged such that the timing advance value is determined within the device.
- 30
19. A method of handover from a first radio access technology to a second radio access technology for a mobile radio communications device within a mobile radio communications network and substantially as hereinbefore described with reference to, and as illustrated in, Figs. 2, 3 and 4 of the accompanying drawings.

20. A mobile radio communications system arranged for a  
handover from a first radio access technology to a second  
radio access technology and substantially as hereinbefore  
described with reference to Figs. 2, 3 and 4 of the  
accompanying drawings.

5

10

15

20


25

30



**ABSTRACT****System and Method for Network Handover**

5       The invention provides for a telecommunications system and related  
method of handover from a first radio access technology to a second radio  
access technology for a mobile radio communications device within a mobile  
radio communications network, and including determining a timing advance  
value associated with the second radio access technology, and the method  
10   employing positional data of the device within the network for determining the  
said timing advanced value.

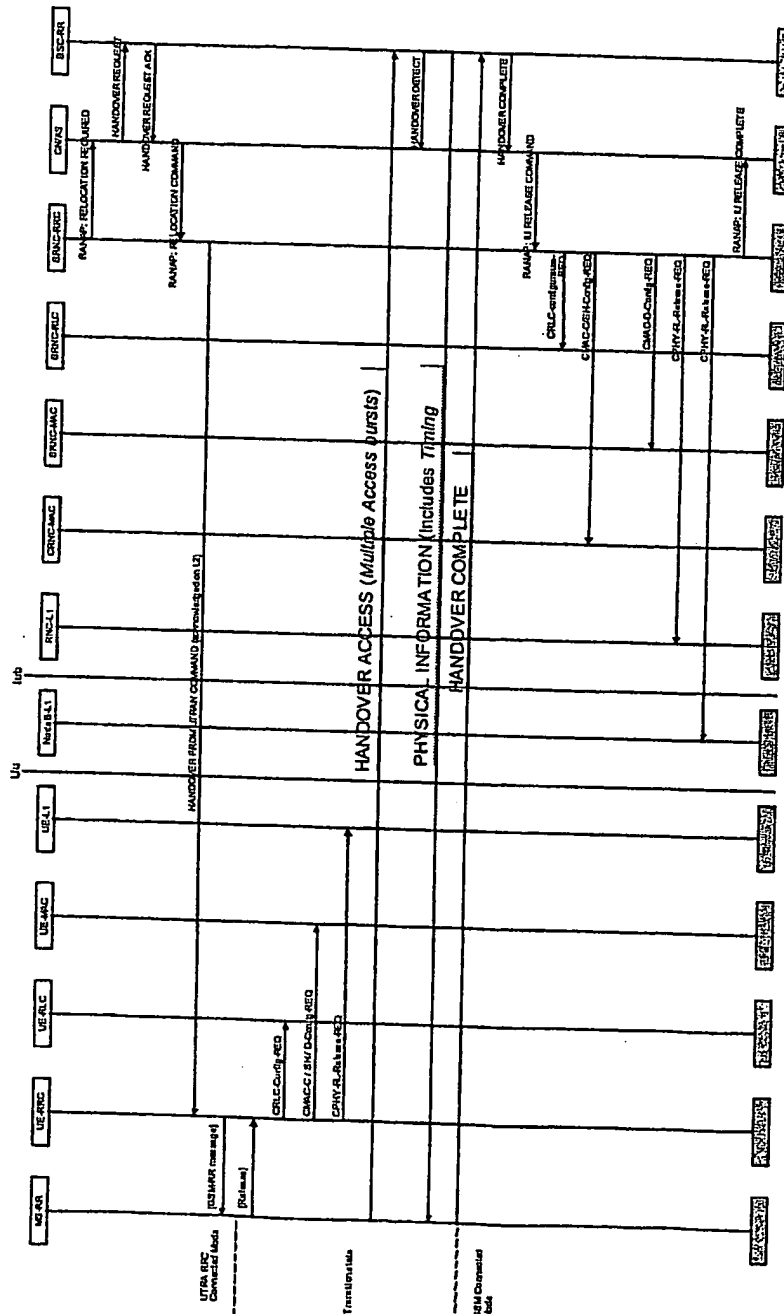

**Fig. 1**

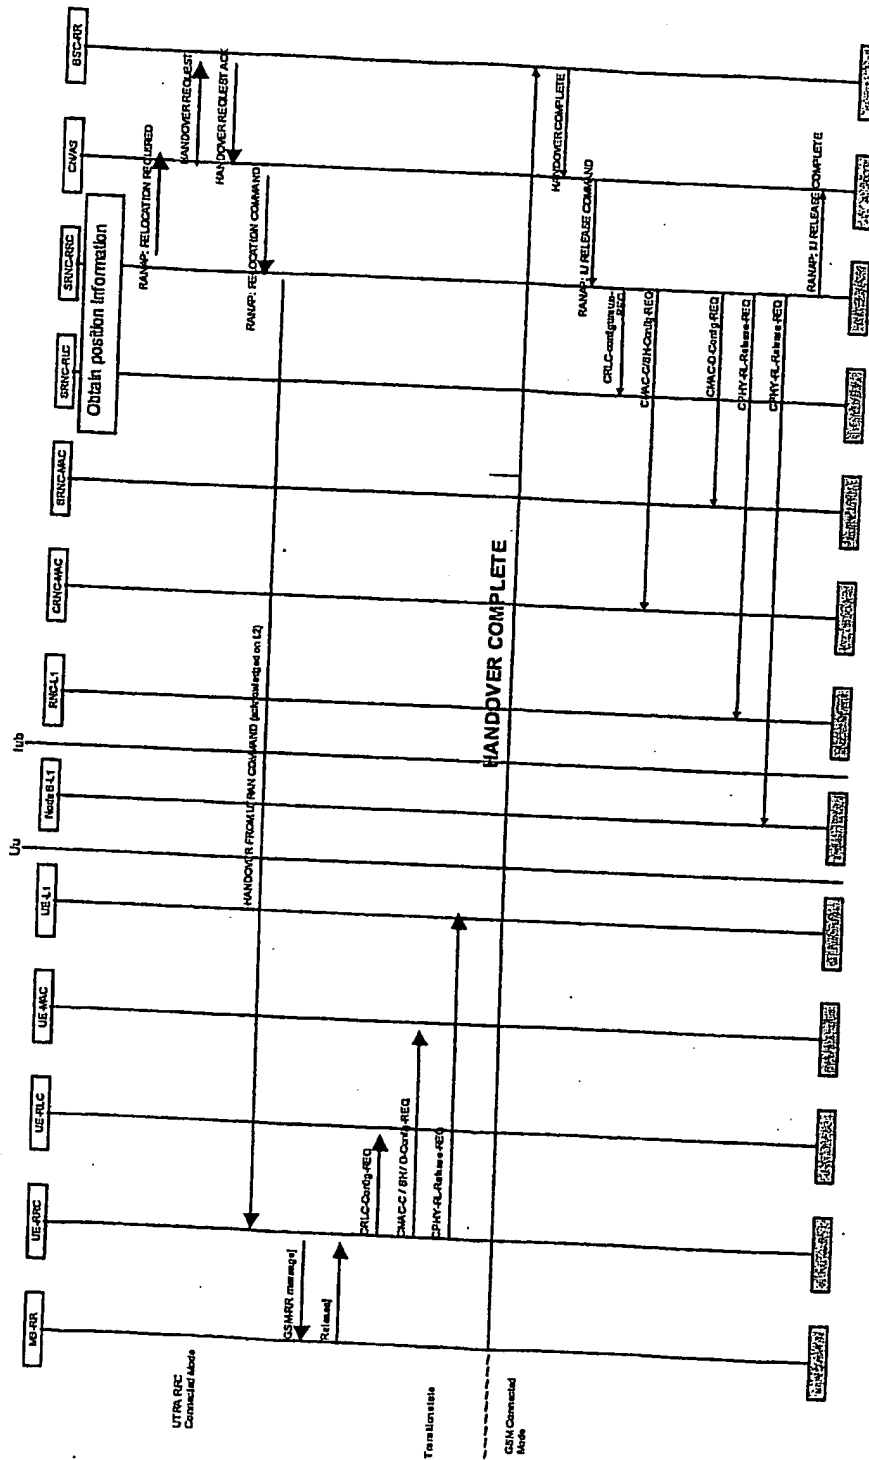


Fig. 2

FIG. 3


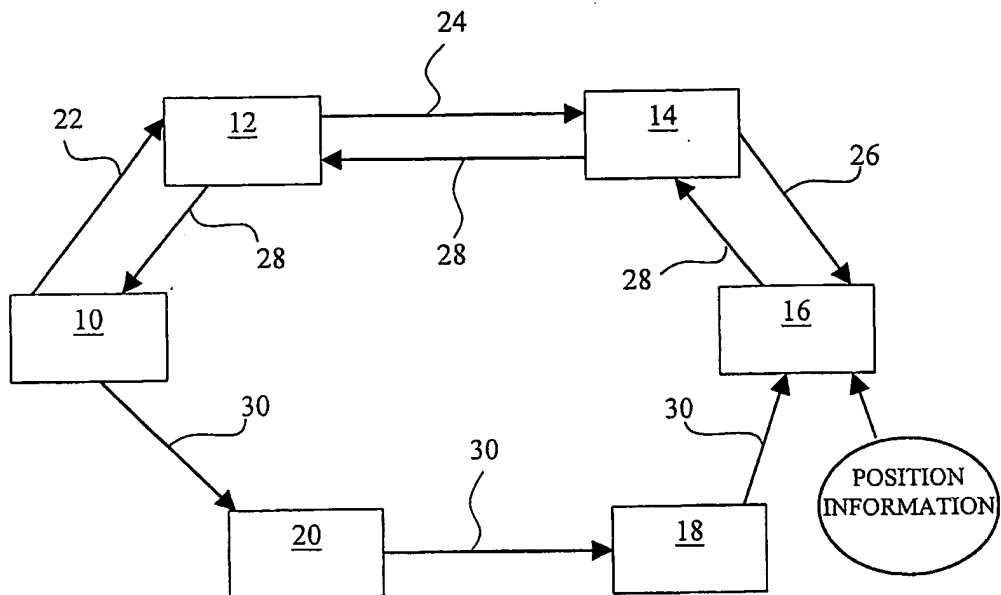


FIG. 4

## STANDARD HANDOVER PROCEDURE



PCT/JP2005/001988

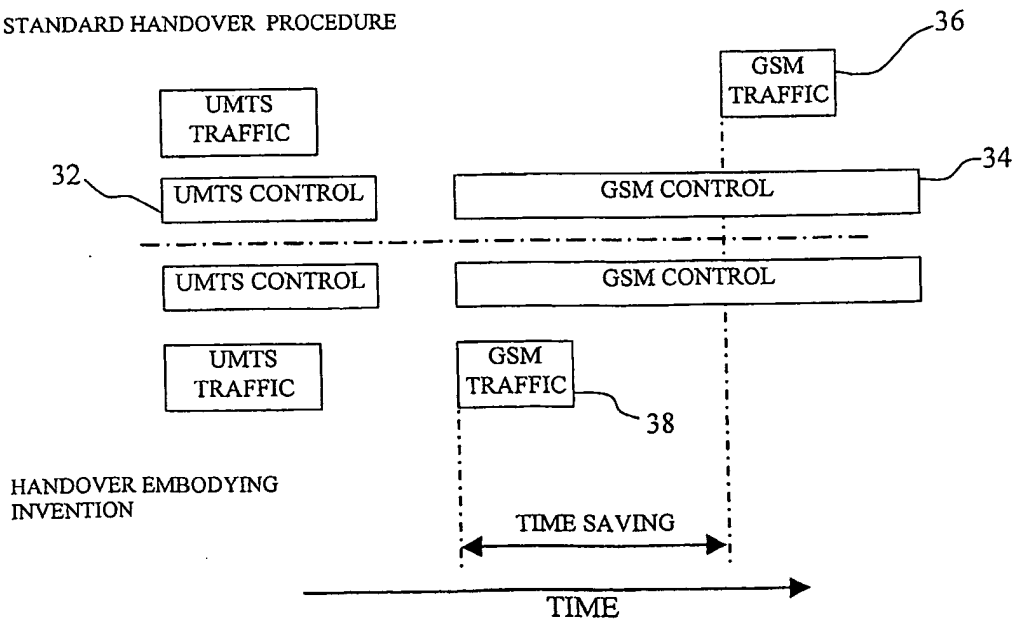